



**INDUSTRIAL
SCIENTIFIC**

T40 II RATTLER™ SINGLE GAS MONITOR T-DOCK™ AUTOMATED MANAGEMENT STATION

The T40 II Rattler™ single gas detector is primarily used to keep personnel safe by detecting the presence of hydrogen sulfide(H_2S), carbon monoxide (CO) or oxygen (O_2), in a serviceable, maintainable, simple to use instrument. The T40 II Rattler™ is the easiest gas detector to service while still making compliance manageable and cost effective with a user-configurable confidence flash. The T40 II Rattler™ is robust and light, with an ingress protection of IP68 and is suitable for working in the most challenging, and hazardous areas. The industrial leading, ultra-fast T90 response time can detect gas hazards on the job in real time, saving valuable time, to ensure worker safety. To meet the needs of long-term operation, the high-performance lithium battery can operate under extreme weather conditions continuously for 2 years.



SIMPLE, RAPID RESPONSE GAS DETECTION

- Robust, compact, and light
- Fast sensor response
- O_2 sensor is warranted for three years
- Replaceable battery with two-year runtime

RAVIER
T40 107






INGRESS PROTECTION **IP66 & IP68**



Withstands total dust ingress
and high-pressure water jets
from any direction.



Completely watertight,
even under conditions of
prolonged submersion.

More Reliable More Dependable

REAL-TIME ALERTS in a COMPACT MONITOR

Regardless of your work environment, the T40 II quickly and clearly alerts you to the presence of gas hazards.

- Cut through high-noise environments with a 95dB audible alarm
- See alerts on two red LED lights and a confidence indicator
- Easily view alerts on a large, backlit LCD screen



SENSOR and CONFIGURATION OPTIONS

The T40 II offers sensor options for multiple industries and applications, making it a reliable option for personal gas detection.

O₂ sensor is warranted for **3 years**.

CO and H₂S sensors are warranted for **2 years**.

CO	0-1000 ppm
CO	0-2000 ppm
H ₂ S	0-100 ppm
H ₂ S	0-200 ppm
H ₂ S	0-500 ppm
O ₂	0-30 %vol




Sensor Options

T40 II COMMON SENSORS BY INDUSTRY

INDUSTRY	CO 1000ppm	CO 2000ppm	H ₂ S 100ppm	H ₂ S 200ppm	H ₂ S 500ppm	O ₂ 30%vol
	Oil and Gas	•	•	•	•	•
	Fire and Hazmat	•	•	•	•	•
	Chemical Refining	•	•	•	•	•
	Pulp and Paper	•	•	•	•	•
	Mining	•	•	•	•	•
	Water	•	•	•	•	•

LEARN MORE ABOUT THE T40 II

www.indsci.com/t40ii

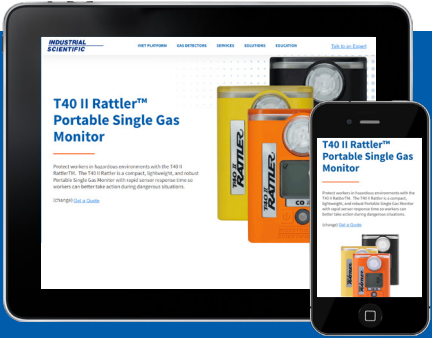

T-DOCK™

AUTOMATED GAS DETECTOR MANAGEMENT SYSTEM


The T-DOCK™ is an intelligent, automated instrument management station for T40 II Rattler™ Single-Gas Monitors.

- Maintain up to eight instruments simultaneously
- Bump test T40 II Rattler™ monitors in just 15 seconds
- No training needed - simple interface is intuitive , one button starts all bump tests
- Automate device management with programmable settings
- Enhance productivity and safety with ultra-fast gas monitor maintenance
- Easily download event logs




8 INSTRUMENTS in 15 SECONDS

The T-DOCK™ offers ultra-fast bump testing capabilities for 8 instruments simultaneously to save space, time, span gas, and enhance productivity for safety teams.

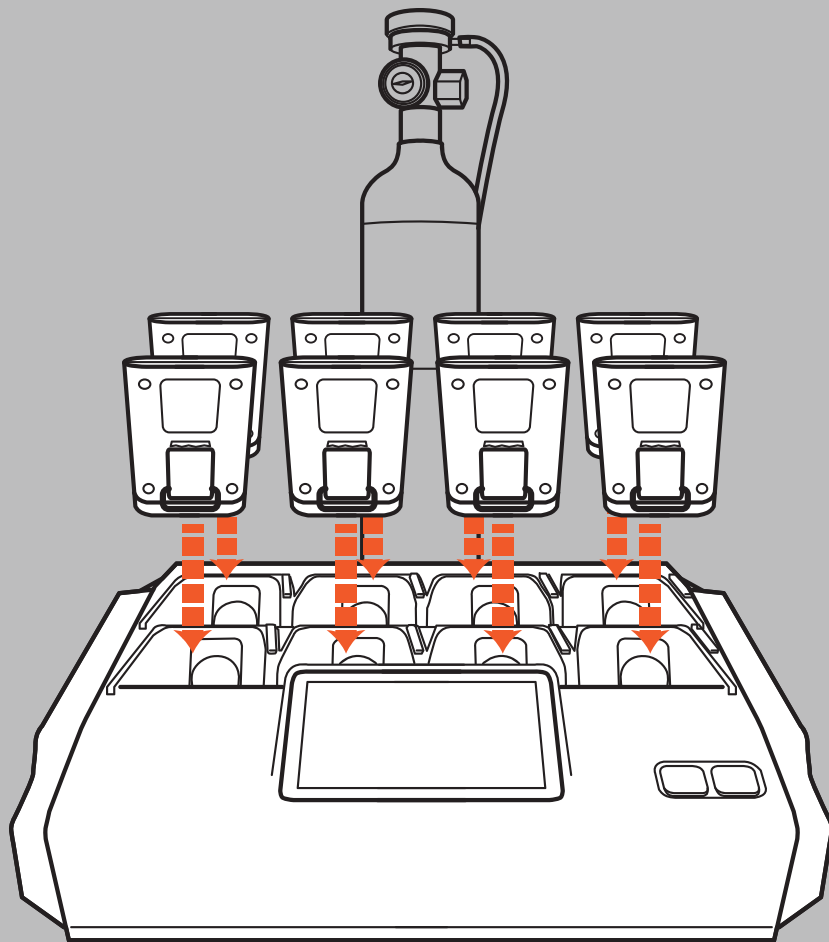

FRIENDLY INTERFACE BY TOUCHING ONE BUTTON STARTS ALL BUMP TESTS

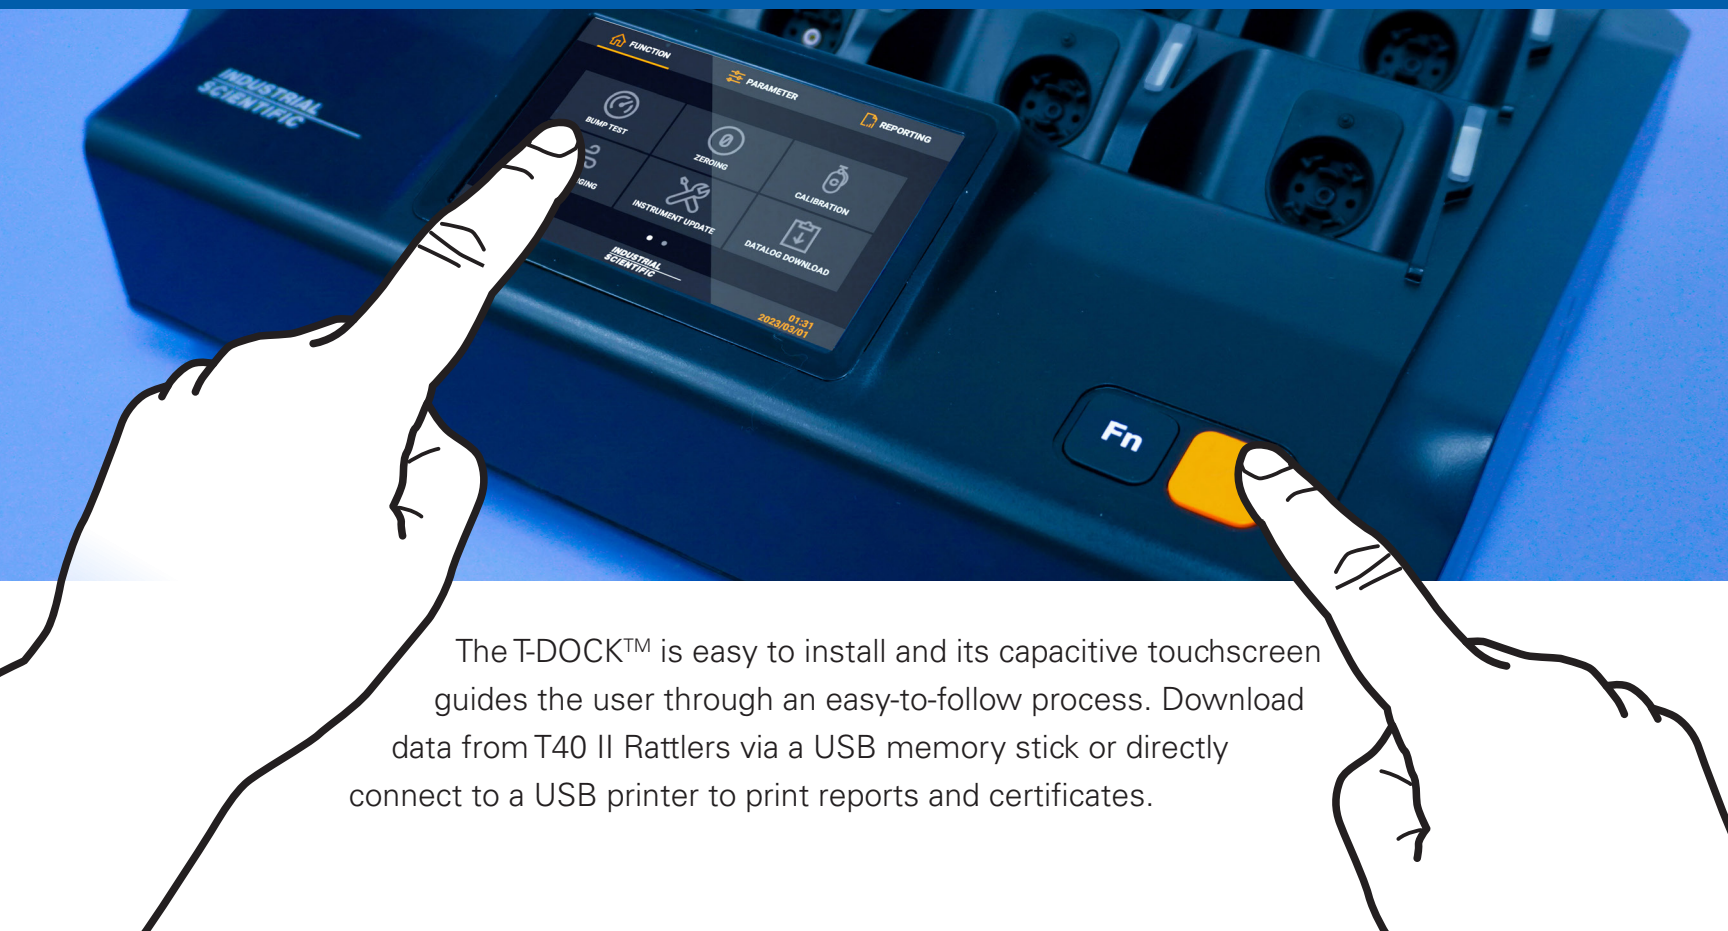

The T-DOCK™ is easy to install and its capacitive touchscreen guides the user through an easy-to-follow process. Download data from T40 II Rattlers via a USB memory stick or directly connect to a USB printer to print reports and certificates.

ANYTIME ANYWHERE FULL OF POWER



The T-DOCK™ is ideal for turnarounds, shutdowns, and mobile applications where power outlets are unavailable thanks to a USB-C power bank.



INDUSTRIAL **SCIENTIFIC**

www.indsci.com

Rev 0423

AMERICAS

Phone: +1-412-788-4353

1-800-DETECTS (338-3287) | info@indsci.com

ASIA PACIFIC

Phone: +65-6561-7377

Fax: +65-6561-7787 | info@ap.indsci.com

EMEA

Phone: +33 (0)1 57 32 92 61

Fax: +33 (0)1 57 32 92 67 | info@eu.indsci.com